


PWA RELEASED AS 102-73192-B

ASSEMBLE PER BOM 102_73192_A.DigiKey.csv
 PICK & PLACE FILE 102_73192_A.pck_plc.txt
 REFERENCE VIEW, TOP 102_73192_A_top.pdf
 REF. VIEW, BOTTOM 102_73192_A_bot.pdf

PADS ARE TYPICALLY OPTIMIZED FOR HAND SOLDERING. THERE WILL BE ADDITIONAL COPPER EXTENDING BEYOND THE END OF THE DEVICE. THIS ADDITIONAL PAD AREA PROVIDES CONTACT AREA FOR THE SOLDERING IRON TIP

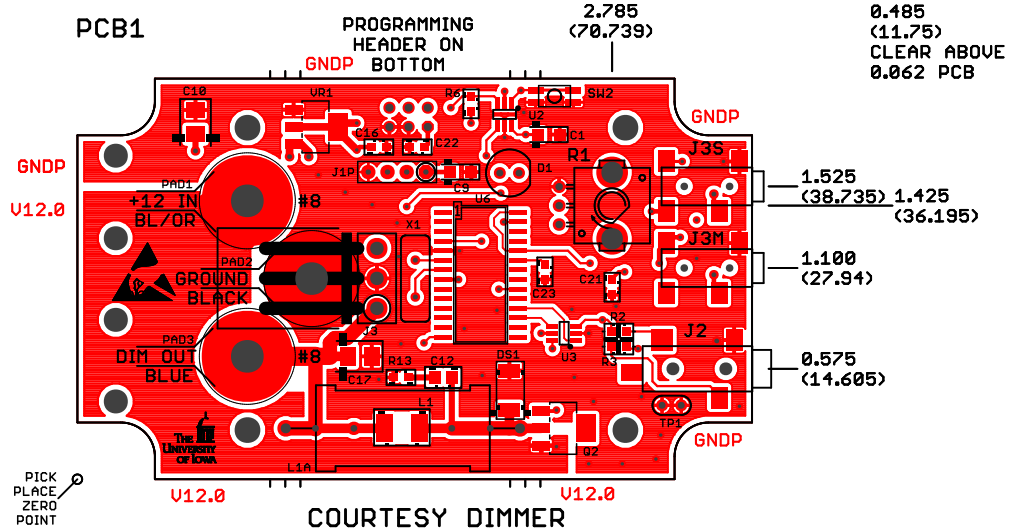


TOP MARKING INK 102_73192_A .gto .GTO

TOP COPPER 102 102_73192_A .gm01 .GTL

PICK PLACE ZERO POINT

Drawn	KC0JFQ	Date	TITLE: COURTESY DIMMER				The University of Iowa Department of Physics & Astronomy Iowa City, IA, USA	
Designed	KC0JFQ	Date	Plot: 4/21/24 12:53 PM		Save: 4/21/24 12:53 PM		A102_73192_B	
Approval 1		Date	CAGE	Series	BLINKING CHIP	LAYERS	Number	REV:
			2D354	102		2	73192	A

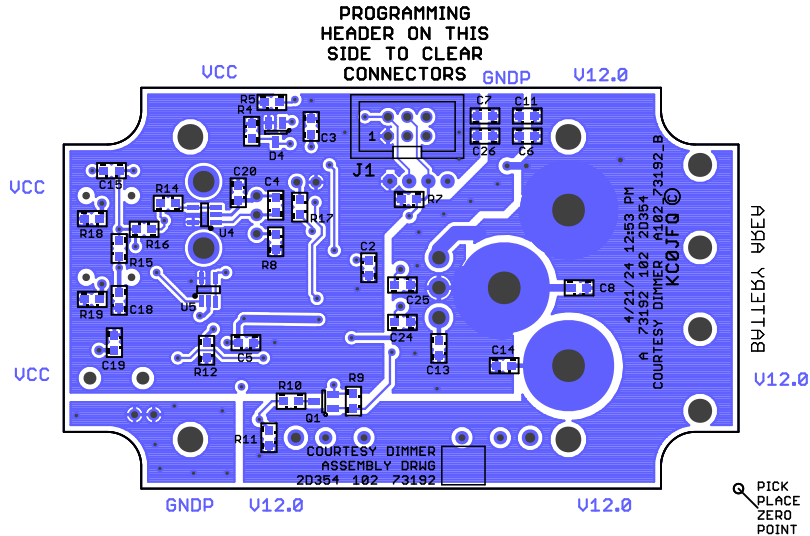

J80. 81mp. A_51825_101 101 R39908 TOR

080. 0dp. A_51825_101 101 MARKING INK TOR

TITLE: COURTESY DIMMER		The University of Iowa Department of Physics & Astronomy Iowa City, IA, USA			
PWA					
Date: 4/21/24 12:53 PM		A102_73192_B			
CAGE	Series	BLINKING CHIP	LAYERS	Number	REV:
2D354	102		2	73192	A